



Clinical Intervention

Data Specifications

Version 1.1 - 29/02/2008

National E-Health Transition Authority Ltd

Level 25
56 Pitt Street
Sydney, NSW, 2000
Australia.
<http://www.nehta.gov.au>

Disclaimer

NEHTA makes the information and other material ("Information") in this document available in good faith but without any representation or warranty as to its accuracy or completeness. NEHTA cannot accept any responsibility for the consequences of any use of the Information. As the Information is of a general nature only, it is up to any person using or relying on the Information to ensure that it is accurate, complete and suitable for the circumstances of its use.

Document Control

This document is maintained in electronic form. The current revision of this document is located on the NEHTA Web site and is uncontrolled in printed form. It is the responsibility of the user to verify that this copy is of the latest revision.

Copyright © 2007, NEHTA.

This document contains information which is protected by copyright. All Rights Reserved. All copies of this document must include the copyright and other information contained on this page.

Document information

Change history

Version	Date	Comments
1.0	29.06.2007	Initial public release
1.1	29.02.2008	<ol style="list-style-type: none">1. minor typographical corrections and wording changes in Introduction2. Figure 1 in Introduction updated to show more comprehensive information3. there are no significant alterations that affect the data structure or use of this document

Acknowledgements

NEHTA would like to thank the following organisations and individuals for their contribution to these Data Specifications:

- Standards Australia;
- Royal Australian College of General Practitioners;
- Society of Hospital Pharmacists of Australia;
- Members of the Australian DataTypes Project;
- Australian Institute of Health & Welfare; and
- Ocean Informatics.

Contents page

Document information	3
Acknowledgements	4
1 Contents page	5
1.1 Purpose and Scope	6
1.2 Intended Audience	6
1.3 Background	6
1.4 NEHTA Clinical Standards Metamodel	6
1.5 Terminology	9
2 Specifications	10
2.1 Obligation Legend	10
2.2 NEHTA Data Specifications ICON Legend	10
Clinical intervention	14
Clinical Intervention Description	16
Clinical Intervention Description Values	17
Clinical Intervention Note	18
Clinical Intervention Outcome	19
Clinical Intervention Outcome Values	20
DateTime Started	21
DateTime Ended	22
Related clinical intervention	23
Reporter Identification	24
Related Problem/Diagnosis	26
DateTime Recorded	27
Acronyms	28
Index	29

1 Introduction

1.1 Purpose and Scope

The Clinical Intervention data group specification forms part of a suite of data specifications that NEHTA is developing for the Australian Health Informatics Community. The suite comprises specifications for a range of health topics (represented as “data groups”), which are generally agreed to be of high priority to standardise in order to achieve the benefits brought about by Level 4 (semantic) interoperability in the Australian health care setting.

1.2 Intended Audience

This document is intended to be read by jurisdictional ICT managers, clinicians involved in Clinical Information System specifications, software architects and developers, and implementers of Clinical Information Systems in various health care settings.

It is reasonably technical in nature and expects the audience to be familiar with the language of health data specification and have some familiarity with health information standards and specifications. Definitions and examples are provided to clarify relevant terminology usage and intent.

1.3 Background

There are several e-health priority areas to be addressed by NEHTA specifications. One area of priority is identification of the data to be communicated and its structure. NEHTA is addressing this through Data Specifications which detail the Data Elements (logically grouped), and their associated value domains.

Data Specifications need to be independent of messaging formats. They are concerned with providing an information framework in which to achieve semantic interoperability.

Data specifications have been developed:

- Based on jurisdiction and clinician identified priorities;
- Specifically to suit the Australian model for a shared EHR;
- To define collections of related information, i.e. event summaries, data groups, data elements;
- To allow for expansion and extension as electronic systems mature;
- So they are ‘human readable’, (with information enhanced by the hierarchical structure);
- Incorporating clinical examples of use to enhance utility and adoption; and
- To provide a set of clinical terminologies, specific to the requirements of the Australian healthcare system.

Whilst shared EHR is referred to in these documents the implementation of the shared EHR is not dealt with here.

1.4 NEHTA Clinical Standards Metamodel

The NEHTA Event Summary and Clinical Data Standards metamodel is used to provide a high level overview of a family of structured documents which includes Clinical Intervention. Within this metamodel, clinical information is organised hierarchically into five levels:

- Event Summary;
- Section;
- Data Group;
- Data Element; and
- Value Domain.

Event summary collection in a Shared EHR System shows the role and structure of an event summary in a shared EHR environment.

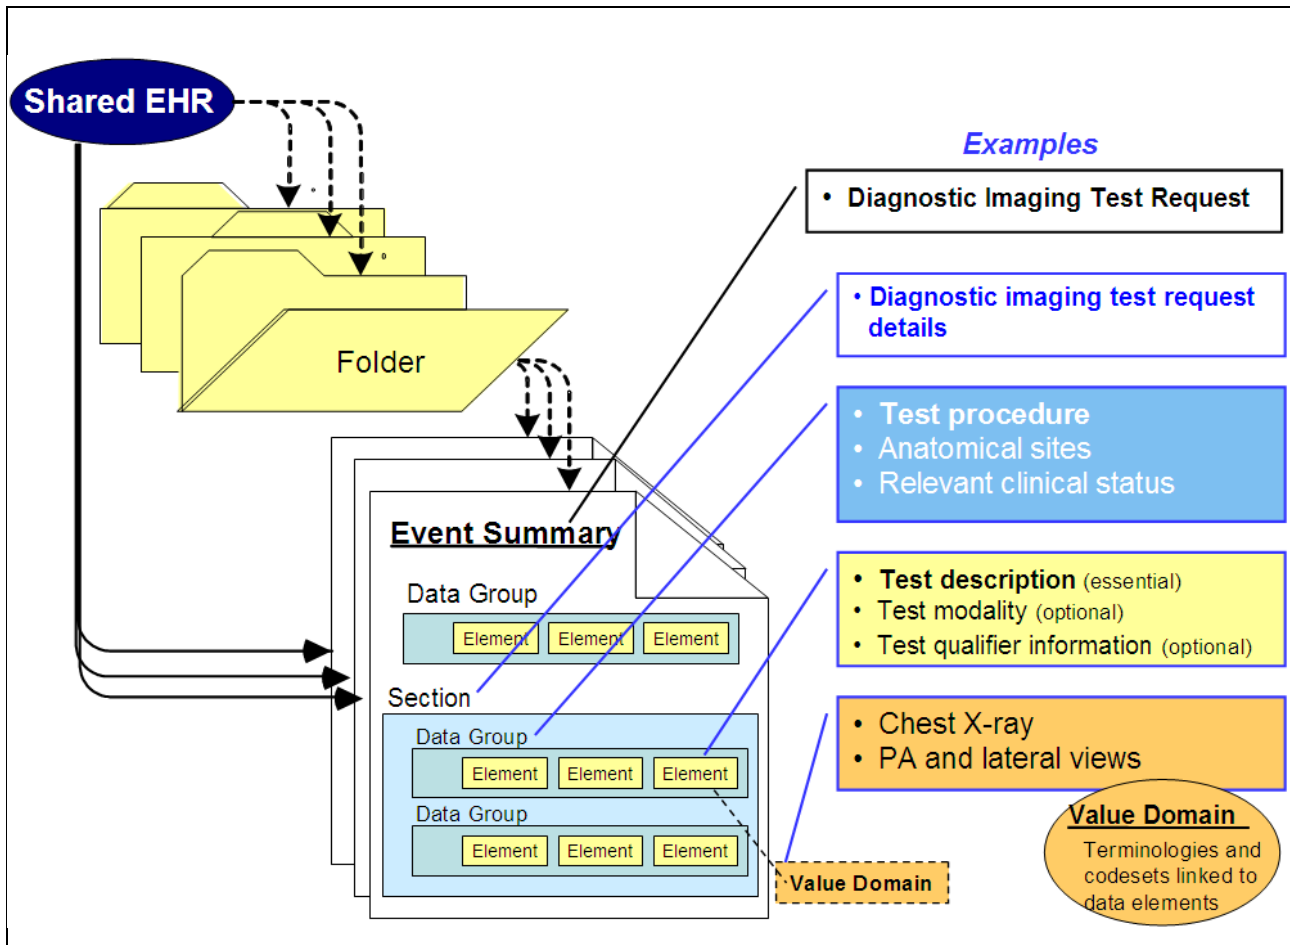


Figure 1 Event summary collection in a Shared EHR System

1.4.1 Event Summary

An event summary is a collection of health information pertinent to a subject of care and is derived from a healthcare event that is relevant to the ongoing care of that individual. The event summary (which is one of a family of care record summaries) is composed of one or more data groups and/or possibly data elements, which are organised into section(s) (see Section below).

Examples of commonly used care record summaries include Referral, Hospital Discharge and Diagnostic Imaging Results.

1.4.2 Section

The contents of an event summary may be organised into one or more sections. A section is an organising container. Its purpose is to organise information in the manner that is suitable for the primary purpose it is collected, and that is useful for healthcare providers. A section also provides a way to navigate through the data items within an event summary, thereby enabling more efficient querying to be made.

1.4.3 Data Group

A data group is a composite data structure (a collection of data elements or smaller data groups) for holding related items of information. Values of all the component data elements are often required to provide unambiguous meaning in a given context. A data group "organises" the data it holds. A data group can only be assigned values through the data elements that are contained within it. Examples of data groups are ADVERSE REACTION, CLINICAL INTERVENTION, and MEDICATION.

1.4.4 Data Element

A data element is the smallest named unit of information in the model that can be assigned a value. Data elements are identified as being either simple or as a component.

A component data element is one that occurs as a member of a composite data structure. A data element that occurs in a segment outside the defined boundaries of a composite data structure is identified as a simple data element. The distinction between simple and component data elements is strictly a matter of context since a data element can be used in either capacity¹.

The permissible values for a data element are constrained by a value domain (see Value Domain).

The same data element can be reused in any number of data groups; e.g. the "DateTime:Start" data element is used in both the ADVERSE REACTION and the ALERT data groups, however a data element may refer to different value domains depending on the context in which it is used.

1.4.5 Value Domain

A value domain constrains the permissible values for a data element. The value domain may specify the type of data value that is valid for a specific data element or be more specific about the coding system the values are drawn from or subset of codes. The values may be a subset of values based on a generic data type. Value domains are reusable components and therefore, the same value domain can be referred to by different data elements in different situations.

Value domains constrain by either specifying a lower and/or upper bound on the range of permissible values or else specify a finite set of prescribed values. Such a set of prescribed values can be specified directly with the definition of the data element, or in a separate but associated specification or else by reference to one or more external vocabulary/terminology sets. Value domain examples (below) are shown below:

Data Element	Data Type	Example of Value Set	Example of Value Domain
Severity	Coded text	Code-set that describes severity of problem, diagnosis, or allergic reaction	"mild", "disabling", "life threatening"
Diagnosis	Coded text	Code set that describe diagnosis, problems, or issues	Valid SNOMED-CT codes drawn from the disorders hierarchy

Table 1: Value domain examples

1.4.6 Classification Scheme

A classification scheme is a terminological system used to classify objects. It is organised in some specified structure, limited in content by a scope, and designed for assigning objects to concepts defined within it. Concepts are usually assigned to an object by linking the terms representing those concepts in the terminological system to the object. This process is called classification, and the terms assigned through classification are used for retrieval. In general, any terminological system is a classification scheme if its intent is for classifying objects².

A classification scheme is used to encompass terminologies and vocabularies used for various uses such as direct clinical use and statistical analysis. Classification schemes are referred to in NEHTA's data specifications where they exist externally and are required in value domains. Often these classifications schemes are underpinned by a set of codes, where each code maps to one or more entries in the classification scheme. Classification schemes are sometimes referred to as codesets.

1. Adapted from the Texas Department of State Health Services, *THCIC Hospital Discharge Data Collection*, THCIC 837\ Technical Specifications (version 13), November 19, 2004.
2. As defined by ISO/IEC 11179.

A value domain may consist of permissible values sourced from zero or more existing, external classification schemes, depending upon the completeness and sufficiency of those classification schemes. Values that are not available in one classification scheme may be obtained from other classification schemes, or depending upon the context and/or local system requirements, a preferred classification scheme may be used from a selection of valid classification schemes for that value domain.

1.5 Terminology

NEHTA is defining a national approach to clinical terminology. An interim licence with the College of American Pathology (CAP) for use of SNOMED CT® within Australia was in place from 2006. The International Health Terminology Standards Development Organisation (IHTSDO) was formed in April 2007 and Australia is one of the foundation member countries. New national SNOMED CT licence arrangements are now in place, managed by NEHTA.

Although SNOMED CT is a comprehensive clinical reference terminology it is recognised that this does not provide a total solution and will need to be supplemented by local extensions. NEHTA is therefore establishing a National Terminology Service to manage Australian extensions to SNOMED CT. For example, the Australian Medicines Terminology will supply terms to populate the Vaccine Brand Name and Route.

2 Specifications




The objective of this specification is to provide detailed information regarding the data elements (and their associative hierarchies and value domains) relevant to the transfer of information within the Clinical Intervention domain.

The specification references other data group information, the details of which may be found in other NEHTA Specifications.

A Section can be thought of as an organisational heading. A data group is a collection of related data elements and/or data groups that can be treated as a single block, which might be subject to cardinality and obligation constraints.

2.1 Obligation Legend

In the following specifications, data obligation may be categorised as:

- Essential:**  Indicating that the data item is considered to be a core component of information and required in order for the entry to make sense, e.g. Alert without an Alert description does not make sense;
- Desirable:**  Indicating that the data item is considered worthy of being supplied where the data is known. The data item is deemed important in terms of providing additional or supplementary information in conjunction with essential data items. The data item should be supplied to provide as much context as possible for users to make informed decisions and/or to support various implementation requirements such as efficient indexing, querying and electronic decision support;
- Optional:**  Indicating that the data item may be supplied if required within a context and if the data is available, but it is not necessary for the data entry to make sense. It is recognised that for more complex or specialised healthcare provider settings, some items deemed optional may be viewed essential to them; or
- Conditional:** *a→b* Indicating that the data item is required on the condition of some other data item(s) being supplied, or based on the value(s) of another data item(s).

2.2 NEHTA Data Specifications ICON Legend







Icon	Metadata Types
	Event Summary
	Sections
	Packages
	Data Groups
	Data Elements
	Value Domains

Table 2 Metadata types





Icon	Explanation
	"Choice data group" - a single data group to be chosen from a set of data groups. Data groups of the same hierarchical depth within a hierarchical data group that make up a "choice set" are indicated using this icon.
	Multiple occurrences.*
	Externally sourced specifications.
	Externally sourced Data Group Specifications.

Table 3 Other Icons







Icon	Datatype	Explanation
	Text	Character strings (with optional language). Unless otherwise constrained by an implementation, can be any combination of alpha, numeric or symbols from the Unicode character set. (Sometimes referred to as free text).
	CodedText	Coded text <i>without</i> exceptions; text with code mappings.
	CodeableText	Coded text with exceptions; flexible datatype to support various ways of holding text, both free text, coded text and combinations of free + coded.
	DateTime	Used for specifying a single date and/or time. Has the ability to indicate a level of precision, as well as an indication that the date/time is estimated. String representations of known dates should conform to ISO 8601.
	Duration	The period of time during which something continues. Usage/Examples Example (1) 3 hours. Example (2) 6 months. Example (3) 1 year.
	Number	A whole number or positive integer, and where (according to ISO 11404) - <i>integer</i> is the mathematical datatype comprising the exact integral values Usage/Examples Example (1) 1. Example (2) 50. Example (3) 125.

Table 4 Datatypes






Icon	Datatype	Explanation
	Boolean	A value of true or false. Usage/Example Example (1) An actual value entered by the user might be "yes" or could be chosen by a mouse click on an icon such as <input checked="" type="checkbox"/>
ID	UniqueIdentifier	A general unique identifier to identify a physical or virtual object or concept.
	TimeInterval	Two Date/Time values that define the initial and later points in time. Usage/Examples Example (1) 12:00 – 18:00. Example (2) 1:30 a.m. – 6:00 p.m.
	Quantity	Used for recording many real world measurements and observations. Consists of the property being recorded, the magnitude value, and the units. It may also include precision and number of decimal places. Usage/Examples Example (1) Property = width. Example (2) Units = centimetres. Example (3) Value = 100.
	QuantityRange	Two <i>Quantity</i> values that define the minimum and maximum values, i.e. lower and upper bounds. This is typically used for defining the valid range of values for a particular measurement or observation. Usage/Examples Example (1) Temperature range of -20 to 100 °C Example (2) 30-50 mg of a prescribed drug.
	EncapsulatedData	Used to specify how to supply metadata such as the type of data encapsulated (such as JPEG images, HTML, etc. using RFC 1521 MIME types), whether the data is inline or passed by reference, what character set is used to encode the data, any low resolution "thumbnail" representation included, any compression algorithm or integrity check information included.

Table 4 Datatypes


Icon	Datatype	Explanation
	Link	<p>This is a general link, reference or pointer to an object, data, or application that exists logically or stored electronically in a computer system.</p> <p>Usage/Examples</p> <p>Example (1) URL (Uniform Resource Locator) – the World Wide Web address of a site on the Internet, such as the URL for the Google Internet search engine – “http://www.google.com”.</p> <p>Example (2) An absolute or relative path within a file/directory structure – e.g. in Windows operating system, the ‘link’ or absolute path to a particular letter (Word document) may be - “C:\Documents and Settings\guestUser\My Documents\Letter.doc”.</p>
A:B	Ratio	<p>The relative magnitudes of two Quantity values (usually expressed as a quotient).</p> <p>Usage/Examples</p> <p>Example (1) 1/3. Example (2) 1:3.</p>
a,b,c...	Sequence	<p>Ordered collection of items.</p> <p>Usage/Example</p> <p>Example (1) A person’s given names, e.g. “David Phillip Andrew” would be held as 3 items grouped in order to form a single entity.</p>
{b,a,c}	Set	<p>Unordered collection of items with values that must be unique within the set.</p>

Table 4 Datatypes

CLINICAL INTERVENTION

Identification

Name	CLINICAL INTERVENTION	
Metadata Type	Data Group	
Identifier	DG-014	<i>External Identifier</i>
Version	1.0	

Definition

Definition	An intervention carried out by a healthcare provider to improve, maintain or assess the health of a subject of care, in a clinical situation. Clinical interventions include invasive and non-invasive procedures, and cognitive interventions.
Definition Source	METeOR glossary
Synonymous Names	Diagnostic intervention, Therapeutic intervention, Diagnostic procedure, Therapeutic procedure, Treatment, Procedure, Counselling, Advising.
Scope	An account of past and present clinical interventions, as performed by a healthcare provider.
Scope Source	NEHTA
Assumptions	

Hierarchical Structure

CLINICAL INTERVENTION		
 T/T ₀₁₀ Clinical Intervention Description		!
 Related Problem/Diagnosis		✓ ↻
 Related clinical intervention		○ ↻
 DateTime Started		○
 DateTime Ended		○
T ₀₁₀ Clinical Intervention Outcome		○
T Clinical Intervention Note		○
 Reporter Identification		!
 DateTime Recorded		!

Usage

Conditions of Use	This data group is repeated for every instance of a clinical intervention.
Conditions of Use Source	NEHTA
Misuse	Recording Medications prescribed; or Reporting Pathology results.







Data Flow

Sender Type	Either system or human.
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.

Recipient Type	Either system or human.
Recipient Role(s)/ Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.

Relationships

Children

Data Type	Name	Version	Obligation	Condition	Occurrence
T/T ₀₁₀	Clinical Intervention Description	1.0	Essential		Single
	Related Problem/Diagnosis	1.0	Desirable		Multiple
	Related clinical intervention	1.0	Optional		Multiple
	DateTime Started	1.0	Optional		Single
	DateTime Ended	1.0	Optional		Single
T ₀₁₀	Clinical Intervention Outcome	1.0	Optional		Single
T	Clinical Intervention Note	1.0	Optional		Single
	Reporter Identification	1.0	Essential		Single
	DateTime Recorded	1.0	Essential		Single

Clinical Intervention Description

Identification

Name	Clinical Intervention Description		
Metadata Type	Data Element		
Identifier	DE-089	<i>External Identifier</i>	
Version	1.0		

Definition

Definition	The clinical intervention provided to the subject of care.		
Definition Source	NEHTA		
Synonymous Names			
Context			
Context Source	NEHTA		
Assumptions			
Data Type	CodeableText		
Value Domain	Clinical Intervention Description Values		

Usage


Conditions of Use			
Conditions of Use Source			
Examples	Example 1) Diagnostic biopsy of bone marrow (MBS item 30087). Example 2) Comprehensive HACCC Assessment Authority (HACC MDS Code 5) .		
Misuse			

Data Flow

Sender Type	Either system or human.		
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.		
Recipient Type	Either system or human.		
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.		

Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Essential		Single

VD Clinical Intervention Description Values

Identification

Name	Clinical Intervention Description Values
Metadata Type	Value Domain
Identifier	VD-016
Version	1.0

Definition

Definition	The clinical intervention provided to the subject of care.
Definition Source	NEHTA

Value Domain

Source	
Version Number	
Permissible Values	Use local terminology until a national standard is defined.

Usage

Default Value	
Conditions of Use	The value domain options are mutually exclusive and cannot be used in conjunction with each other.
Conditions of Use Source	NEHTA
Misuse	

Relationships

Parents

Data Type	Name	Version
T/T ₀₁₀	Clinical Intervention Description	1.0

Clinical Intervention Note

Identification

Name	Clinical Intervention Note		
Metadata Type	Data Element		
Identifier	DE-595	<i>External Identifier</i>	
Version	1.0		

Definition

Definition	Free text comments relevant to the clinical intervention in question.
Definition Source	NEHTA
Synonymous Names	
Context	Used to provide additional narrative information in relation to the clinical intervention.
Context Source	NEHTA
Assumptions	
Data Type	Text
Value Domain	

Usage


Conditions of Use	
Conditions of Use Source	
Examples	
Misuse	

Data Flow

Sender Type	Either system or human.
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.
Recipient Type	Either system or human.
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.

Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Optional		Single

DE Clinical Intervention Outcome

Identification

Name	Clinical Intervention Outcome		
Metadata Type	Data Element		
Identifier	DE-594	<i>External Identifier</i>	
Version	1.0		

Definition

Definition	The expected result of the clinical intervention, as judged by the performing healthcare provider.
Definition Source	NEHTA
Synonymous Names	
Context	This data item indicates whether the healthcare provider judges the clinical intervention to have been successful or not, the technical result of the intervention and the consequent state of well being of the subject of care.
Context Source	
Assumptions	
Data Type	CodedText
Value Domain	Clinical Intervention Outcome Values

Usage


Conditions of Use	
Conditions of Use Source	
Examples	Example 1) Intervention successful as expected - no complications. Example 2) Intervention unsuccessful as expected - with complications.
Misuse	

Data Flow

Sender Type	Either system or human.
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.
Recipient Type	Either system or human.
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.

Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Optional		Single

VD Clinical Intervention Outcome Values

Identification

Name	Clinical Intervention Outcome Values
Metadata Type	Value Domain
Identifier	VD-128
Version	1.0

Definition

Definition	The expected result of the clinical intervention as judged by the performing healthcare provider.
Definition Source	NEHTA

Value Domain

Source	NEHTA
Version Number	
Permissible Values	successful - no complications; successful - with complications; unsuccessful - no complications; and unsuccessful - with complications.

Usage

Default Value	
Conditions of Use	The value domain options are mutually exclusive and cannot be used in conjunction with each other.
Conditions of Use Source	NEHTA
Misuse	

Relationships

Parents

Data Type	Name	Version
T ₀₁₀	Clinical Intervention Outcome	1.0

DateTime Started

Identification

Name	DateTime Started		
Metadata Type	Data Element		
Identifier	DE-15509	<i>External Identifier</i>	
Version	1.0		

Definition

Definition	The date or date and time that specific Clinical Intervention was initiated. <i>The date and time could be automatically generated the system, or could be entered or overridden by a user if required.</i>		
Definition Source	NEHTA		
Synonymous Names			
Context			
Context Source			
Assumptions			
Data Type	DateTime		
Value Domain			

Usage


Conditions of Use	Where possible, exact dates should be used. Incomplete dates should generally only be used for retrospective data collection.
Conditions of Use Source	NEHTA
Examples	Example 1) 31/03/2004. Example 2) 03/2004. Example 3) 2004. Example 4) 31/03/2004 13:10.
Misuse	Entering approximate dates when an exact date is available.

Data Flow

Sender Type	Either system or human.
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.
Recipient Type	Either system or human.
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.

Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Optional		Single

DateTime Ended

Identification

Name	DateTime Ended		
Metadata Type	Data Element		
Identifier	DE-15510	External Identifier	
Version	1.0		

Definition

Definition	The date or date and time that specific Clinical Intervention was completed. <i>The date and time could be automatically generated the system, or could be entered or overridden by a user if required.</i>
Definition Source	NEHTA
Synonymous Names	
Context	
Context Source	
Assumptions	
Data Type	DateTime
Value Domain	

Usage


Conditions of Use	Where possible, exact dates should be used. Incomplete dates should generally only be used for retrospective data collection.
Conditions of Use Source	NEHTA
Examples	Example 1) 31/03/2004. Example 2) 03/2004. Example 3) 2004. Example 4) 31/03/2004 13:10.
Misuse	Entering approximate dates when an exact date is available.

Data Flow

Sender Type	Either system or human.
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.
Recipient Type	Either system or human.
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.

Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Optional		Single

Related clinical intervention

Identification

Name	Related clinical intervention		
Metadata Type	Data Element		
Identifier	DE-624	<i>External Identifier</i>	
Version	1.0		

Definition

Definition	The clinical intervention to which the current issue/event is related.
Definition Source	NEHTA
Synonymous Names	
Context	
Context Source	
Assumptions	
Data Type	Link
Value Domain	

Usage


Conditions of Use	This element provides a link to one or more clinical interventions.
Conditions of Use Source	
Examples	
Misuse	

Data Flow

Sender Type	Either system or human.
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.
Recipient Type	Either system or human.
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.

Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Optional		Multiple

REPORTER IDENTIFICATION

Identification

Name	REPORTER IDENTIFICATION		
Metadata Type	Data group		
Identifier	DG-15512	External Identifier	AS4846-2006
Version	1.0		

Definition

Definition	Details pertinent to the identification of a healthcare provider individual who is reporting the clinical intervention information.
Definition Source	NEHTA
Synonymous Names	
Context	
Context Source	NEHTA
Scope	
Scope Source	NEHTA
Assumptions	

Usage


Conditions of Use	
Conditions of Use Source	
Misuse	

Data Flow



Sender Type	Either system or human.
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.
Recipient Type	Either system or human.
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.





Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Essential		Single

Children

Data Type	Name	Version	Obligation	Condition	Occurrence
	HEALTHCARE PROVIDER IDENTIFIER-INDIVIDUAL (see external reference for full specification: AS4846 - 2006)	1.0	Desirable		Single
	PERSON NAME (see external reference for full specification: AS4846 - 2006)	1.0	Essential		Single

	<p>ORGANISATION NAME (see external reference for full specification: AS4846 - 2006)</p>	<p>1.0</p>	<p>Conditional</p>	<p>(required if requesting healthcare provider facility is external to the Diagnostic Imaging Service provider facility)</p>	<p>Single</p>
	<p>ADDRESS (see external reference for full specification: AS4846 - 2006)</p>	<p>1.0</p>	<p>Conditional</p>	<p>(required if requesting healthcare provider facility is external to the Diagnostic Imaging Service provider facility)</p>	<p>Single</p>
	<p>ELECTRONIC COMMUNICATION DETAILS (see external reference for full specification: AS4846 - 2006)</p>	<p>1.0</p>	<p>Essential</p>		<p>Single</p>
	<p>Provider Occupation Category</p>	<p>1.0</p>	<p>Optional</p>	<p>(may be required for certain test requests, e.g. MRI)</p>	<p>Single</p>

Related Problem/Diagnosis

Identification

Name	Related Problem/Diagnosis		
Metadata Type	Data Element		
Identifier	DE-262	<i>External Identifier</i>	
Version	1.0		

Definition

Definition	The underlying problem/diagnosis to which the current issue is related.		
Definition Source	NEHTA		
Synonymous Names			
Context	This item identifies the relevant health problem experienced by the subject of care, as assessed by the healthcare provider.		
Context Source			
Assumptions			
Data Type	Link		
Value Domain			

Usage


Conditions of Use	This element provides a link to one or more established problem(s) or diagnoses.		
Conditions of Use Source			
Examples			
Misuse	Creating a new problem/diagnosis.		

Data Flow

Sender Type	Either system or human.		
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.		
Recipient Type	Either system or human.		
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.		

Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Desirable		Multiple

DateTime Recorded

Identification

Name	DateTime Recorded		
Metadata Type	Data Element		
Identifier	DE-15511	<i>External Identifier</i>	
Version	1.0		

Definition

Definition	The date or date and time that specific Clinical Intervention information was recorded. <i>The date and time could be automatically generated the system, or could be entered or overridden by a user if required.</i>
Definition Source	NEHTA
Synonymous Names	
Context	
Context Source	
Assumptions	
Data Type	DateTime
Value Domain	

Usage


Conditions of Use	Where possible, exact dates should be used. Incomplete dates should generally only be used for retrospective data collection.
Conditions of Use Source	NEHTA
Examples	Example 1) 31/03/2004. Example 2) 03/2004. Example 3) 2004. Example 4) 31/03/2004 13:10.
Misuse	Entering approximate dates when an exact date is available.

Data Flow

Sender Type	Either system or human.
Sender Role(s)/Organisation(s)/Jurisdiction(s)	Sender Role(s) can include: Healthcare provider. Sender Organisation Role(s) can include: Healthcare institution, Medical practice.
Recipient Type	Either system or human.
Recipient Role(s)/Organisation(s)/Jurisdiction(s)	Recipient Role(s) can include: Healthcare provider. Recipient Organisation Role(s) can include: Healthcare institution, Medical practice.

Relationships

Parents

Data Type	Name	Version	Obligation within parent	Condition within parent	Occurrence within parent
	CLINICAL INTERVENTION	1.0	Optional		Single

Acronyms

AIHW	Australian Institute of Health & Welfare
EHR	Electronic Health Record
HL7	Health Level Seven
MBS	Medical Benefits Scheme
METeOR	MEtadata On-line Registry (http://meteor.aihw.gov.au)
NEHTA	National E-Health Transition Authority
SEHR	Shared Electronic Health Record

Index

C

Clinical intervention 14
 Clinical Intervention Description 16
 Clinical intervention description values 17
 Clinical intervention note 18
 Clinical intervention outcome 19
 Clinical Intervention Outcome Values 20
 conditional 10

D

Data Element
 DE-089 - Clinical Intervention Description 16
 DE-15509 - DateTime Started 21
 DE-15510 - DateTime Ended 22
 DE-15511 - DateTime Recorded 27
 DE-262 - Related Problem/Diagnosis 26
 DE-594 - Clinical intervention outcome 19
 DE-595 - Clinical intervention note 18
 DE-624 - Related clinical intervention 23
 Data Group
 DG-014 - Clinical intervention 14
 DG-15512 - Reporter Identification 24
 date
 end 22
 recorded 27
 start 21
 DateTime Ended 22
 DateTime Recorded 27
 DateTime Started 21
 description 16
 desirable 10
 diagnosis
 related 26

E

essential 10

I

intervention 14
 intervention date 21, 22, 27

N

note 18

O

obligation
 Conditional 10
 Desirable 10
 Essential 10
 Optional 10
 optional 10
 outcome 19
 outcome values 20

P

procedure 16
 procedure date 21, 22, 27

R

Related clinical intervention 23
 Related Problem/Diagnosis 26
 Reporter Identification 24

S

Specifications 10

T

treatment 16

V

Value Domain
 VD-016 - Clinical intervention description values 17
 VD-128 - Clinical Intervention Outcome Values 20

End of
Clinical Intervention Data Specifications